



RWL worm gear winch with freewheel system

H

Properties


- Construction according to DIN 15020.
- Braked design
- Crank gradually adjustable in length.
- Drum and shafts provided with bearings.
- Freewheel, through protected pawl system.
- Powdercoating RAL2004.

Options

- Steel cable upon request.

type	ref. no.	capacity 1st layer (kg)	crank length (mm)	cable storage (m)	∅ cable (mm)	trans- mission	weight without cable (kg)
RWL-250	2018001	250	250/100	20	5	15:1	11
RWL-500	2018003	500	250/100	30	6	24:1	17
RWL-1000	2018005	1000	350/100	35	9	26:1	43

standard delivery without cable

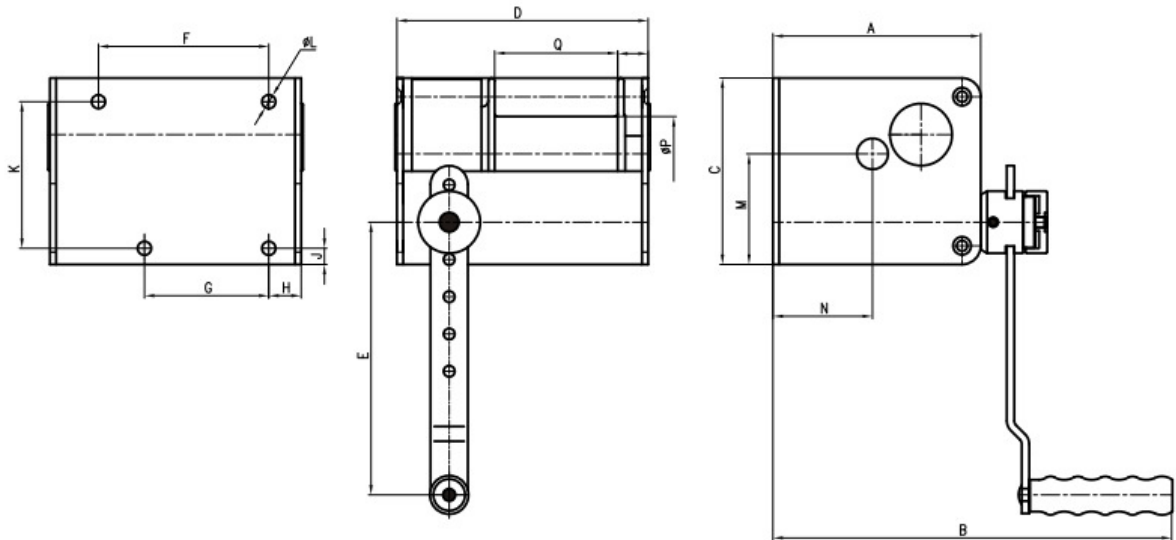

type	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	G (mm)	H (mm)	J (mm)	K (mm)	L ∅ (mm)	M (mm)	N (mm)	P (mm)	Q (mm)	R (mm)
RWL-250	167	332	150	202	137	100	26	13	118	11	89.0	80	60	99	24.5
RWL-500	195	360	188	260	182	130	32	18	142	13	111.5	93	70	144	29.0
RWL-1000	295	490	300	300	167	167	32	21	250	17	180.5	136	102	158	33.0