


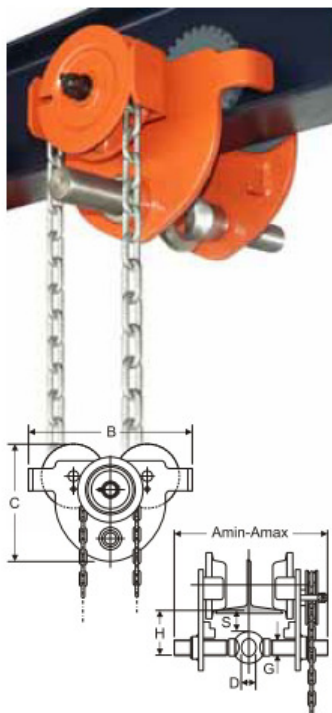

SELECT 30G geared trolleys

Please check correct flange width

Q

As series 30P models except that these are equipped with a hand chain of 2.5 m operating height.

- Dimensions of hand chains: 5 x 23.6 mm, electro-plated.

type	ref. no.	safe working load (kg)	flange width (mm)	minimum radius (mm)	weight (kg)
S30G - 0.5	0917001	500	50 - 220	850	9.0
S30G - 1.0	0917003	1.000	58 - 220	1.000	13.0
	0917005		165 - 305		14.0
S30G - 1.5	0917007	1.500	66 - 220	1.100	15.5
	0917009		165 - 305		16.5
S30G - 2.0	0917011	2.000	66 - 220	1.100	18.5
	0917013		165 - 305		19.5
S30G - 3.0	0917015	3.000	74 - 220	1.300	27.5
	0917017		178 - 305		29.0
S30G - 5.0	0917019	5.000	90 - 220	1.400	40.0
	0917021		178 - 305		42.0

type	Amin (mm)	Amax (mm)	B (mm)	C (mm)	H (mm)	S (mm)	D (mm)	G (mm)
S30G - 0.5	284	-	206	156	74	32	25	30
S30G - 1.0	302	388	252	190	90	38	30	36
S30G - 1.5	302	388	265	205	106	38	40	48
S30G - 2.0	314	400	276	222	106	38	40	48
S30G - 3.0	328	415	335	262	121	40	46	58
S30G - 5.0	346	432	377	292	136	42	52	65