


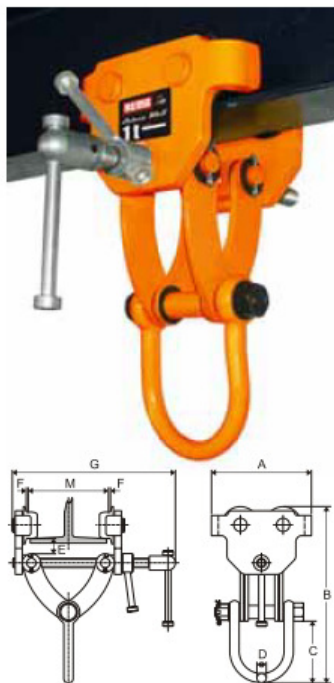

SELECT 30S spindle trolleys

Q

REMA Select 30 spindle hand trolley can be mounted easily, quickly and safely as an aid for mounting work to be carried out at various sites.

Properties

- Robust steel design at low tare weight.
- Can be mounted quickly by means of a spindle.
- Safe use thanks to the extra lock lever.
- Anti-tilt and wheel fracture support devices.
- Running wheels are supported on maintenance-free ball-bearings.

type	ref. no.	safe working load (kg)	flange width M (mm)	minimum radius (mm)	weight (kg)
S30S 005	0918001	500	64 - 203	1100	6
S30S 010	0918003	1000	63 - 203	1100	7
S30S 020	0918005	2000	76 - 203	1300	20
S30S 030	0918007	3000	76 - 203	1400	32
S30S 050	0918009	5.000	100 - 305	1500	53

type	A (mm)	Bmin (mm)	Bmax (mm)	C (mm)	D (mm)	E (mm)	G (mm)
S30S 005	174	263	324	105	16	25.4	340
S30S 010	174	263	324	105	16	25.4	340
S30S 020	280	339	387	111	22	25.4	340
S30S 030	345	374	438	127	27	26.0	345
S30S 050	395	450	528	135	35	81.0	465