


CS vertical plate lifting clamps

H

Lifting clamps for safe transportation of steel plates in vertical position.

Properties

- Fitted with standard lifting eyes movable in a single direction.
- Even in initial position, the safety lock exerts force on plates by means of a spring so that they may not drop out of the clamps.
- For hoisting steel plates up to hardness 37 RC (345 HB).
- Rated load capacity and size of jaw opening are clearly shown on lifting clamps.
- Suitable for lifting steel plates, rotating them by 180° and transportation them in vertical position.
- Safety factor min. 5 x rated load capacity.
- Each lifting clamps is subject to test load at 2 x rated load capacity.

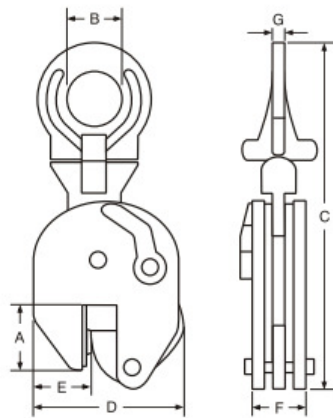

type	ref. no.	safety working load (kg)	jaw opening (mm)	dimensions in mm							weight (kg)
				A	B	C	D	E	F	G	
CS- 0.75	3360001	750	0 - 13	47	30	200	90	35	37	10	1.5
CS- 1.0	3361001	1.000	0 - 20	55	45	255	135	38	29	15	3.5
CS- 1.5	3360003	1.500	0 - 20	77	65	335	165	55	54	15	6.0
CS- 2.0	3361002	2.000	0 - 35	77	65	340	165	55	54	16	6.5
CS- 3.0	3361003	3.000	0 - 35	77	65	340	180	55	54	16	7.5
CS- 4.0	3361004	4.000	0 - 45	85	70	440	230	70	78	20	14.5
CS- 6.0	3361006	6.000	0 - 50	110	75	480	230	70	80	20	20.0
CS- 9.0	3361009	9.000	0 - 60	110	75	550	280	115	86	20	24.0
CS-12.0	3361012	12.000	0 - 75	125	86	610	270	95	94	44	42.0
CS-15.0	3361015	15.000	0 - 75	125	86	610	390	145	100	40	54.0

