




CU universal plate lifting clamps

H

Lifting clamps fitted with universal lifting eye for safe transportation of steel plates in vertical position.

Properties

- Equipped with a universal lifting eye movable in two directions.
- Even in initial position, the safety lock exerts force on plates by means of a spring so that they may not drop out of the clamps.
- For hoisting steel plates up to hardness 37 RC (345 HB)
- Rated load capacity and size of jaw opening are clearly shown on lifting clamps.
- For lifting steel plates, rotating them 180° and transportation them in vertical position.
- Safety factor min. 5 x rated load capacity.
- Each plate grip is subject to test load at 2 x rated load capacity.

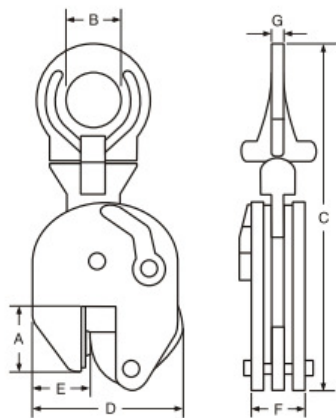

type	ref. no.	safety working load (kg)	jaw opening (mm)	dimensions in mm							weight (kg)
				A	B	C	D	E	F	G	
CU- 0.75	3362001	750	0 - 13	47	30	217	90	35	37	10	1.7
CU- 1.0	3363001	1.000	0 - 20	55	45	330	125	38	45	16	4.5
CU- 1.5	3362003	1.500	0 - 20	77	70	350	165	55	54	17	7.0
CU- 2.0	3363002	2.000	0 - 35	77	70	365	180	55	54	16	7.3
CU- 3.0	3363003	3.000	0 - 35	77	70	365	180	55	54	16	8.0
CU- 4.0	3363004	4.000	0 - 45	85	75	435	230	70	78	20	15.5
CU- 6.0	3363006	6.000	0 - 50	110	80	510	280	115	80	35	23.0
CU- 9.0	3363009	9.000	0 - 60	110	80	580	280	115	90	35	40.0
CU-12.0	3363012	12.000	0 - 75	125	80	630	395	145	100	35	58.0
CU-15.0	3363015	15.000	0 - 75	125	80	630	395	145	100	40	62.0

